

Main

Range of product	Canalis
Product name	KS
Product or component type	Elbow
Busbar description	Standard
Bar material	Aluminium
Device application	Change direction
[Ie] rated operational current	500 A at 35 °C
Direction change type	direction 1: edgewise to upward -

Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Operating angle	90 °
Mounting location	On trunking
Mounting position	Any position
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Width	146 mm
Depth	113 mm
Height	290 mm
Net weight	5 kg

Environment

Standards	IEC 61439-6 IEC 60439-2
-----------	----------------------------


Offer Sustainability

Sustainable offer status	Green Premium product
--------------------------	-----------------------

EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Environmental Disclosure	Product Environmental Profile

Contractual warranty

Warranty	18 months
----------	-----------

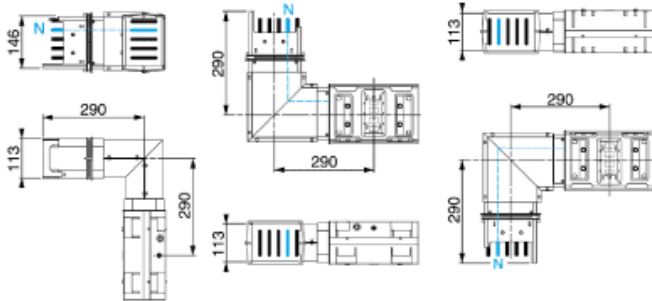

Dimensions

KSA630DLE40

A (mm)	290
B (mm)	290
C (mm)	-
D (mm)	-
Fire barrier	No
Fire barrier position	-