


KSA630DMCL4CF has not been replaced. Please contact your customer care centre for more information.



⚠ Discontinued

Main

Range of product	Canalis
Product name	KS
Product or component type	Multiple elbow
Busbar description	Fire barrier
Device application	Change direction
[Ie] rated operational current	500 A at 35 °C 630 A at 35 °C
Direction change type	direction 1: edgewise to upward - neutral to down direction 3: flat to left - neutral to right

Complementary


[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Dimension type	Made to measure
Operating angle	90 °
Mounting mode	By screws
Electrical connection	Lubricated sliding contact
Standards	IEC 61439-6 IEC 60439-2
Width	167 mm
Depth	118 mm
Length	Side 1: 290...785 mm Side 3: 290...785 mm
Colour	White (RAL 9001)
Net weight	18 kg

Environment

IP degree of protection	IP55 conforming to IEC 60529
IK degree of protection	IK08 conforming to IEC 62262

Contractual warranty

Warranty	18 months
----------	-----------

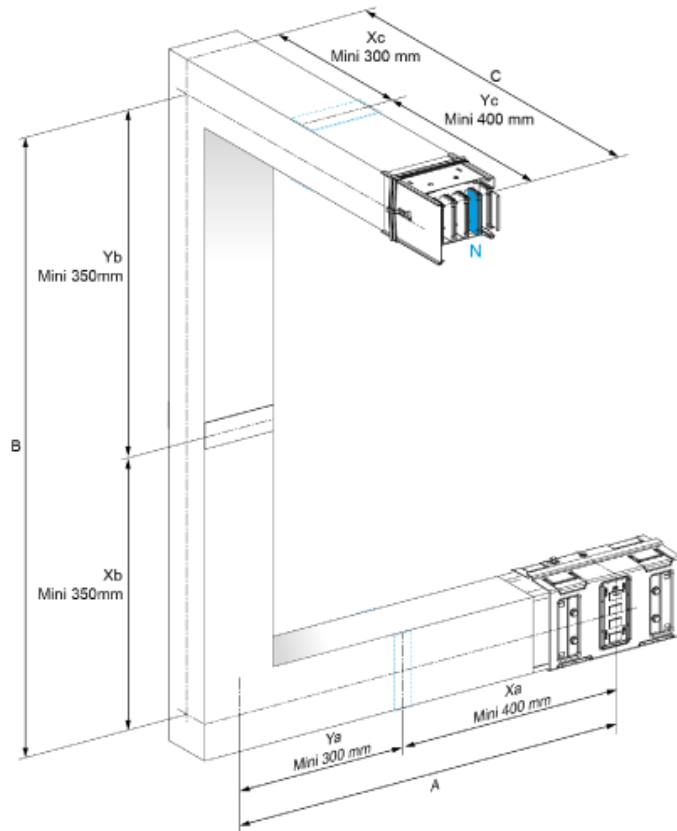

Dimensions

KSA630DMCL4CF

A (mm)	-
B (mm)	-
C (mm)	-
D (mm)	-
Fire barrier	Yes
Fire barrier position	Either on side A or B or C