

### Main

Range of product	Canalis
Product name	KS
Product or component type	Cross
Busbar description	Standard
Bar material	Aluminium
Device application	Change direction
[Ie] rated operational current	500 A at 35 °C
Direction change type	Edgewise to perpendicular - neutral to up

### Complementary

[Ue] rated operational voltage	230...690 V
Network frequency	50/60 Hz
Operating angle	90 °
Mounting location	On trunking
Mounting position	Any position
Electrical connection	Lubricated sliding contact
Mounting mode	By screws
Net weight	11 kg

### Environment

Standards	IEC 60439-2 IEC 61439-6
-----------	----------------------------


### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) <a href="#">EU RoHS Declaration</a>

Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">Download RoHS China Declaration</a> Pro-active China RoHS declaration (out of China RoHS legal scope)
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations <a href="#">End of Life Information</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

### Contractual warranty

Warranty	18 months
----------	-----------

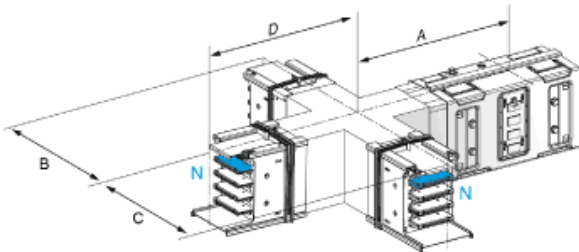

Dimensions		KSA630DXC40
------------	--	-------------

A (mm)	290
B (mm)	290
C (mm)	290
D (mm)	290
Fire barrier	No
Fire barrier position	-